

# Initial Attack Done Safely With Limited Staff . . .



*Blitzfire HE Portable Monitor  
and Max Force Dual  
Pressure Nozzle*

## . . . REALLY !

With a flow rating up to 500 gpm, the TFT Blitzfire and Blitzfire HE Portable Monitors are integrated with an exclusive safety shutoff system that helps prevent unintentional movement during critical fireground operations.

Compact and lightweight in design, the monitors feature TFT's exclusive slide valve for complete nozzle man flow control. Both offer a low attack angle of 10 degrees, while the Blitzfire HE adjusts up to 86 degrees above horizontal.

To learn more about how you can provide maximum performance and safety with limited staff during initial attack operations, contact your local TFT dealer today.



**TASK FORCE TIPS**  
Made in USA • [www.tft.com](http://www.tft.com)

3701 Innovation Way, Valparaiso, IN 46383-9327 USA  
US & CN 800.348.2686 • 1.219.462.6161 • fax 1.219.464.7155



U.S. & Canada **800.348.2686** [www.tft.com](http://www.tft.com)  
**24 Hour Service Team: 800.854.6864**

TASK FORCE TIPS 3701 INNOVATION WAY, VALPARAISO, IN 46383-9327 MADE IN USA

## BLITZFIRE HE®



## BLITZFIRE®




### BLITZFIRE SERIES VIDEO

Visit [www.tft.com/FE10](http://www.tft.com/FE10) to see a complete video overview of TFT's Blitzfire and Blitzfire HE Portable Monitors.

## BLITZFIRE HE® AND BLITZFIRE® SERIES PORTABLE MONITORS WITH SAFETY SHUT-OFF VALVE


The Task Force Tips' Blitzfire HE and Blitzfire are simple, light, and highly maneuverable attack monitors. Both feature low elevation angle making them suitable for use indoors. They can go anywhere a handline goes while delivering much more water. If these monitors start to slide or lift, the SAFETY SHUT-OFF VALVE automatically shuts off the flow of water. This patented safety feature reduces the risk of injury from an out-of-control appliance. The shut-off action slows near stroke end to reduce the effects of water hammer. To reset the flow, simply open the valve to any of six detent flow positions with the turbulence-free slide valve. Both monitors discharge pivots make directing the stream extremely quick and effortless, and each outlet has a built-in stream shaper. A unique up/down pivot on the hose inlet allows each monitor to have stability even on porches, stair landings or the like. An anchor strap is included for safe operation on slick surfaces like marble floors. Each monitors main body is hardcoat anodized aluminum with a blue TFT powder coat finish inside and out.

### XX111A-HE 26.8 lb (12.6kg)

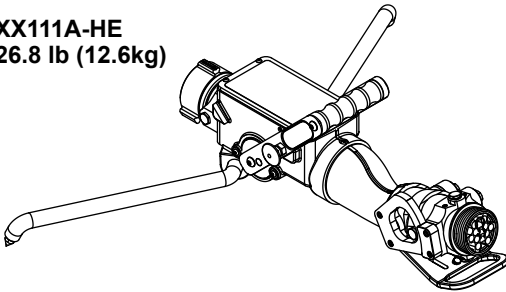



XX111A-HE BLITZFIRE HE and XX111A BLITZFIRE MONITORS Flow range up to 500 gpm (2000 l/min). Both monitors feature low friction inlet and outlet pivots. Outlets have built-in stream shapers. BLITZFIRE elevation is manually adjustable between 10 and 50 degrees above horizontal. BLITZFIRE HE elevation is manually adjustable between 10 and 86 degrees above horizontal. Horizontal rotation for both is manually adjustable 20 degrees either side of center. The SAFETY SHUT-OFF VALVE for each will shut off flow if monitor slides or lifts. Both have six detent flow positions with patented turbulence free slide valves for operator flow control. When the legs are folded on either monitor, the carbide tips point up for carrying safety. The heavy-duty carbide tipped legs are easily folded out to a wide deployed stance. Stowed in storage bracket overall size for each monitor is 29.5"L x 8.1"W x 8.5"H (74.9 x 20.6 x 21.6 cm). Standard inlet is 2.5" NH (65mm) rocker lug swivel coupling. Standard outlet is 2.5" NH (65mm) rigid male threads.

### XX111A 22.0 lb (10.7kg)

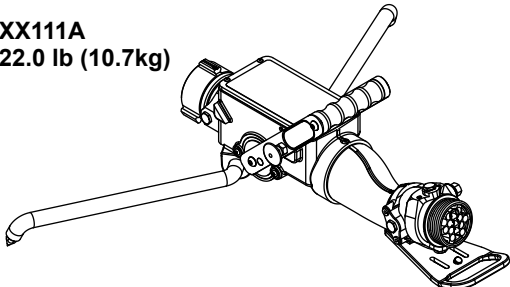

XX-B STORAGE BRACKET BLITZFIRE This stainless steel and hard coat aluminum storage bracket can be mounted for rapid deployment of a pre-connected Blitzfire. Mount on any accessible vertical or horizontal surface. Comes complete with mounting screws. 20"L x 8.5"W x 2"H (50.8 x 21.6 x 5.1 cm)

### XX-B 3.4 lb (1.5kg)

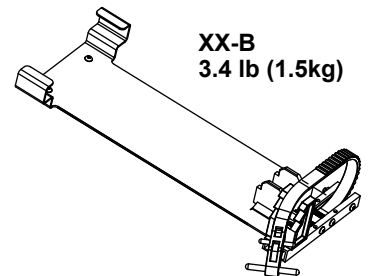

### MST-3NJ 2.3 lb (1.0kg) 11.80" (3.0cm)

MST-3NJ 3 STACKED TIPS Hardcoat anodized aluminum alloy for maximum corrosion protection. Flow charts for each tip are lasered. Tip sizes are 1.5", 1.25", and 1.0" (38, 32 and 25mm) diameter. Small tips may be removed for break and extend operations with a 1.5" NH (38mm) hose thread. Standard swivel inlet is 2.5" NH (65mm).